

Band pass n258 24.25-27.5 GHz

Product number: ZEN – 500 – 100 – 34

Small size air cavity
Low insertion loss
High out-of-band attenuation

| Band pass 24.25 – 27.50 GHz | Frequency Range [GHz] | Requirement |
|-----------------------------|-----------------------|-------------|
| Passband | 24.25 – 27.50 | |
| Return Loss | 24.25 – 27.50 | > 16 dB |
| Insertion Loss Max | 24.25 – 27.50 | < 1.0 dB |
| Rejection | DC – 20.8 | > 100 dB |
| Rejection | 20.8 – 22.3 | > 70 dB |
| Rejection | 30.0 – 32.0 | > 70 dB |
| Rejection | 32.0 – 45.0 | > 100 dB |
| Rejection | 45.0 – 48.0 | > 70 dB |

| Power handling | |
|----------------|--------------------|
| Average | max 10 W (40 dBm) |
| Peak | max 100 W (50 dBm) |

| Mechanical | |
|------------|--|
| Dimensions | 24 x 23 x 9 mm (excluding connectors) 43 x 23 x 9 mm (including connectors) |
| Connectors | SMA (f) |

| Environmental | |
|--------------------|------------------|
| Temperature range | +18 °C to +40 °C |
| Ingress Protection | IP63 |
| Altitude | 3000 m |





Small size air cavity

Low insertion loss

High out-of-band attenuation

Band pass n258 24.25-27.5 GHz

Product number: ZEN - 500 - 100 - 34

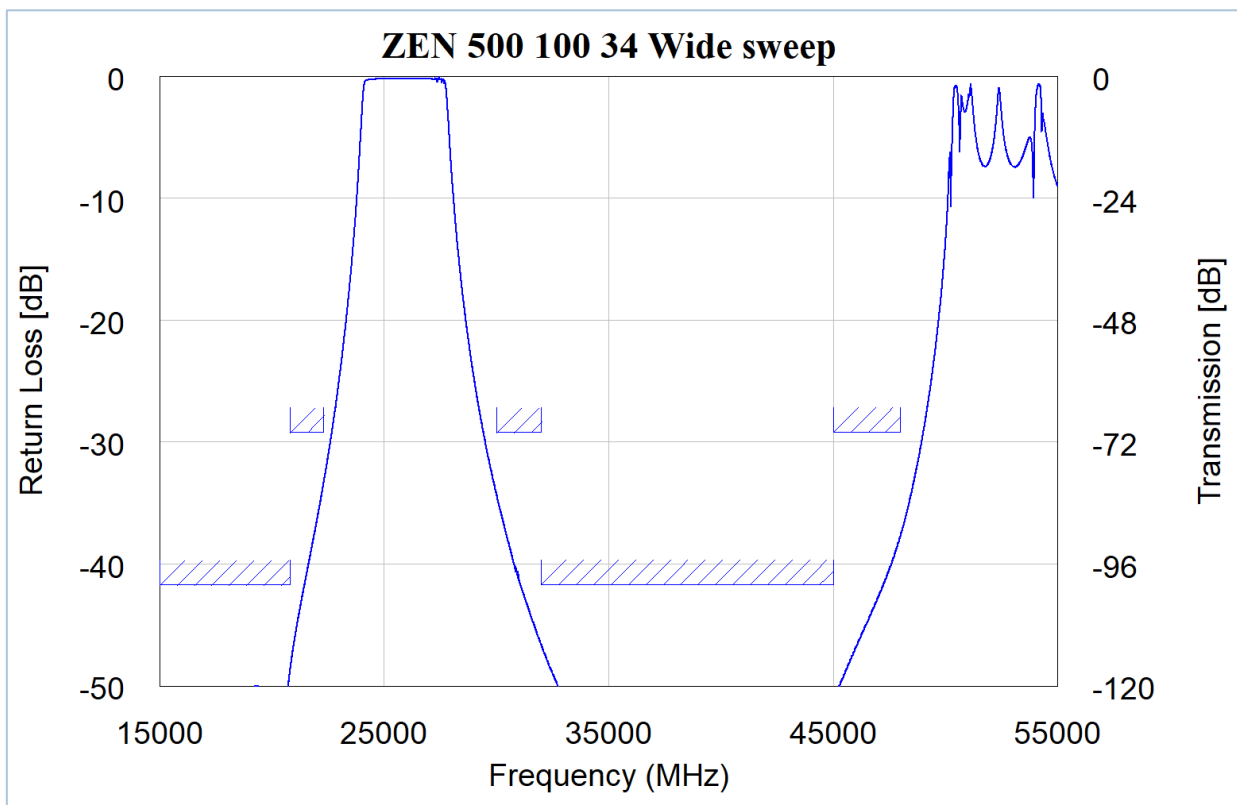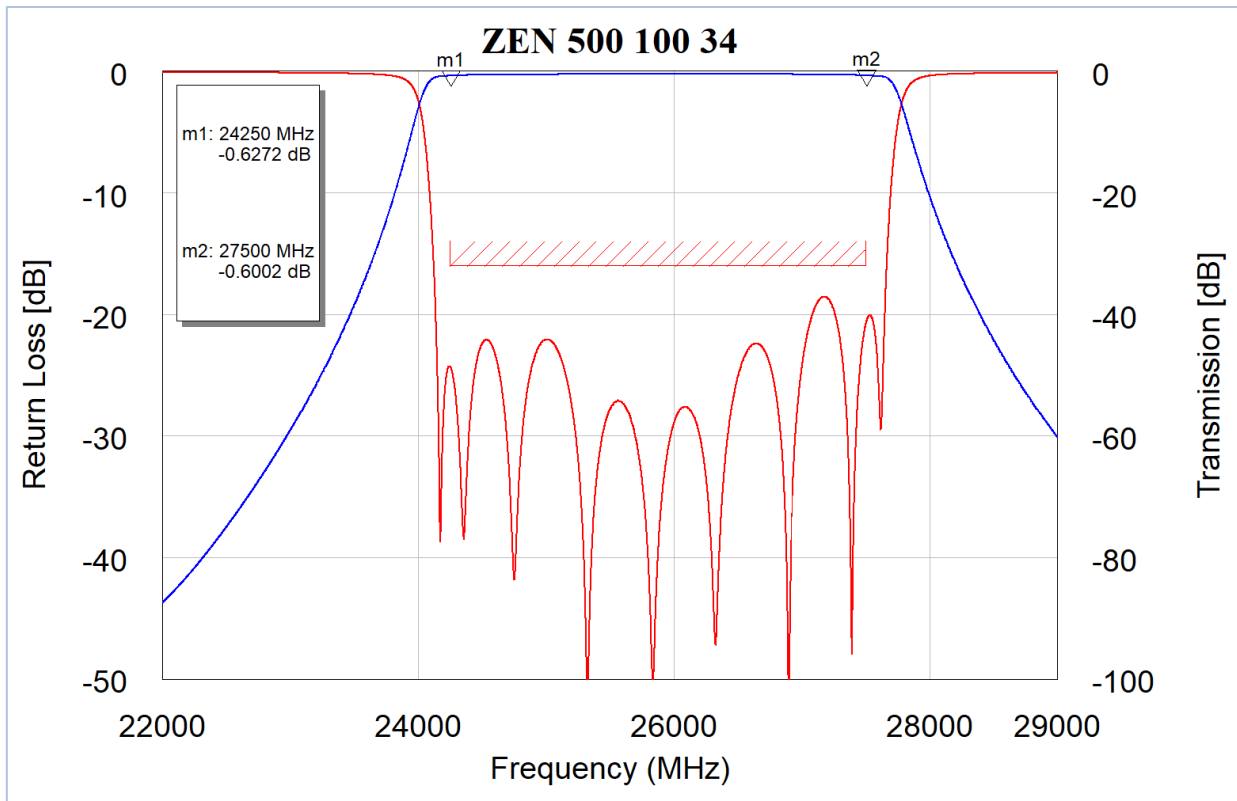



Small size air cavity

High out-of-band attenuation

Band pass n258 24.25-27.5 GHz

Product number: ZEN - 500 - 100 - 34

